


ACCESSORIES HY-14-147

HY-14-147

FEATURES

- Assembled with load cell H14W
- Alloy steel construction
- Built-in horizontal movement control
- Easy load cell (re)placement after mount installation
- Good self-aligning ability ,anti-reversal




SPECIFICATION

Capacity	SR	H1	θmax 1)	S max 2)	FR (% of applied load) 3)	
					at S max	at S=1mm
2.8t / 6t	50	56	5°	4.9	6.8%	1.39%
13	66	68	5°	5.9	8.2%	1.38%
28	72	74	5°	6.5	8.2%	1.26%
60	100	90	5°	7.8	10.6%	1.35%
130t	125	116	3°	6.1	6.0%	0.99%
280t	183	170	3°	8.9	6.0%	0.67%

- 1) θmax: Maximum .permissible skewing
 3) FR: Maximum horizontal force

- 2) S max: Maximum horizontal movement

DIMENSIONS IN MM

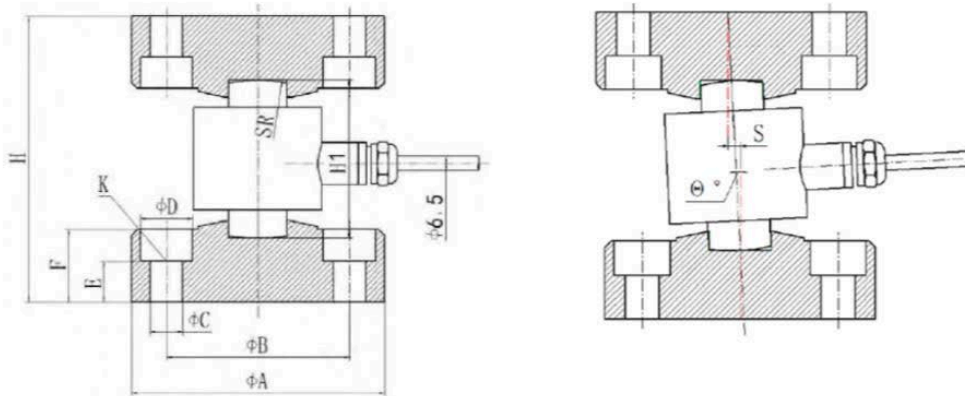

Dimension Capacity	ΦA	ΦB	ΦC	ΦD	E	F	K	H
2.8t, 6t	Φ87	Φ63	Φ11	Φ18	14	25	Two drilled holes 180°	100
13t	Φ97	Φ73	Φ11	Φ18	21	32		120
28t	Φ108	Φ84	Φ11	-	-	28		136
60t	Φ137	Φ112	Φ11	-	-	42	Four drilled holes 90°	174
130t	Φ176	Φ148	Φ11	-	-	52	Four drilled holes 90°	220
280t	Φ226	Φ190	Φ14	-	-	65		300